

# Haishen5 Series

# PCIe 5.0

## DapuStor Enterprise NVMe SSD



The DapuStor Haishen5 Series adopts the latest Marvell™ PCIe Gen5 enterprise controller named Bravera™ and 3D eTLC NAND Flash with DapuStor in-house firmware. It offers **double throughput compared with the PCIe Gen4 enterprise SSD**. The DapuStor PCIe Gen5 eSSD is designed for data centers, catering to the increasingly storage demands of different industries, like IT, Internet, Finance, Operators, Smart manufacturing, AI, as well as Oil, Electricity and Energy industries.

### Enhanced Reliability By Multiple Security Protection

The Haishen5 Series supports multiple enterprise-level security features such as end-to-end data protection, DST, Sanitize, Secure Boot and TCG OPAL 2.0 to ensure system and data security.

### Stronger Performance

The Haishen5 Series offers more excellent performance for overall storage system with sequential read/write speeds up to **14000/4900 MB/s**, SS random read/write IOPS up to **2800K/370K**, and 4K random read/write latency less than **57/8 μs**.

**14000/4900 MB/s**  
Sequential Read/Write(MB/s)

**2800K/370K**  
Random Read/Write(IOPS)

**57/8 μs**  
Read/Write Latency(μs)

### Support Advanced Features Customisation

The Haishen5 Series supports multiple VSS sector formats, **NVMe 2.0** and NVMe MI 1.2 protocols, and Multi Stream. Other advanced features in the planning such as ZNS, and SR-IOV that can be customized.

#### The Latest Form Factor


- Support the latest EDSFF E1.S, E3.S and U.2
- Support OCP 2.0

#### Rich Capacity

- Capacities range from 3.2TB to 15.36 TB
- QLC SSDs offer a capacity up to 32 TB

#### PCIe 5.0

Built on Marvell™ PCIe 5.0 enterprise controller

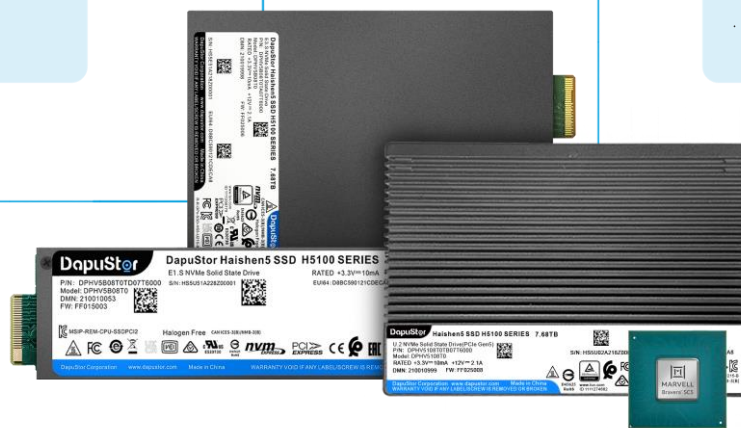

#### Low Latency

4K Read/Write Latency: 57/8 μs

### Marvell® Bravera™ SC5 SSD Controllers

PCIe 5.0 SSD Controller supporting up to 16 NAND Channels for enabling next generation cloud storage solutions. Featuring ultra low latency (< 6μs) can enable SSD storage solutions that offer levers to control and meter performance at the drive level being able to offload hypervisors and free up host system resources.

# Haishen5 Series

## DapuStor Enterprise NVMe SSD



### | Product Specifications

PCN (Product Code Name)	H5100		H5300	
Capacity(TB)	3.84	7.68	3.2	6.4
Form Factor	E1.S			
Interface	PCIe 5.0 x 4, NVMe 2.0			
Read Bandwidth (128KB) MB/s	14000	14000	14000	14000
Write Bandwidth (128KB) MB/s	4800	4900	4800	4900
Random Read (4KB)K IOPS	2800	2800	2800	2800
Random Write (4KB) K IOPS	200	200	360	370
4K Random Latency (Typ.) R/W $\mu$ s	57/8			
4K Sequential Latency (Typ.) R/W $\mu$ s	7/8			
Power	Typical: $\leq$ 17.5 W, Idle: $\leq$ 7 W			
Flash Type	3D eTLC NAND Flash			
Endurance	1 DWPD		3 DWPD	
MTBF	2.5 million hours			
UBER	1 sector per $10^{17}$ bits read			
Warranty	5 yrs			


\*Differences in hardware, software, or configuration will affect actual test results.

✉ [mkt@dapustor.com](mailto:mkt@dapustor.com)

☎ +86 400-9938-968

🌐 <http://en.dapustor.com/>

📍 Chuangtou Building, Longgang District, Shenzhen , China



Copyright© DapuStor Corporation All rights reserved.

Any third party can't extract or copy any part or the whole content of the document without the permission of the company. And any third party can't distribute in any way.

All trademarks in this document belong to DapuStor Corporation

**DapuStor**