


Haishen5 Series

DapuStor Enterprise NVMe SSD

PCIe 5.0

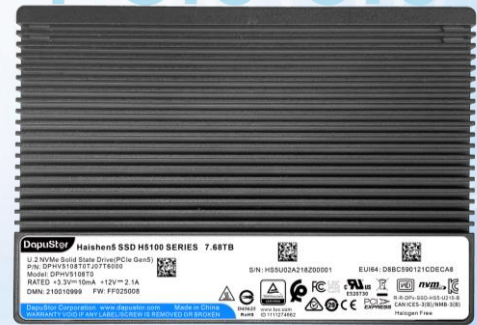

The DapuStor Haishen5 Series adopts the latest Marvell™ PCIe Gen5 enterprise controller named Bravera™ and 3D eTLC NAND Flash with DapuStor in-house firmware. It offers **double throughput compared with the PCIe Gen4 enterprise SSD**. The DapuStor PCIe Gen5 eSSD is designed for data centers, catering to the increasingly storage demands of different industries, like IT, Internet, Finance, Operators, Smart manufacturing, AI, as well as Oil, Electricity and Energy industries.

Enhanced Reliability By Multiple Security Protection

The Haishen5 Series supports multiple enterprise-level security features such as end-to-end data protection, DST, Sanitize, Secure Boot and TCG OPAL 2.0 to ensure system and data security.

Stronger Performance

The Haishen5 Series offers more excellent performance for overall storage system with sequential read/write speeds up to **14000/9000 MB/s**, SS random read/write IOPS up to **2800K/750K**, and 4K random read/write latency less than **54/8 μs**.

14000/9000 MB/s
Sequential Read/Write(MB/s)

2800K/750K
Random Read/Write(IOPS)

54/8 μs
Read/Write Latency(μs)

Support Advanced Features Customisation

The Haishen5 series eSSDs support various VSS sector formats, NVMe 2.0 and NVMe MI 1.1 protocols, and Multi Stream. They are also compatible with Flexible Data Placement(FDP). In specific scenarios, Write Amplification Factor (WAF) can be reduced to 1. Features can be customized based on customer requirements.

The Latest Form Factor

- Support the latest EDSFF E1.S, E3.S and U.2
- Support OCP 2.5

Rich Capacity


- Capacities range from 3.2TB to 30.72 TB
- QLC SSDs offer a capacity up to 32 TB

PCIe 5.0

Built on Marvell™ PCIe 5.0 enterprise controller

Low Latency

4K Read/Write Latency: 54/8 μs

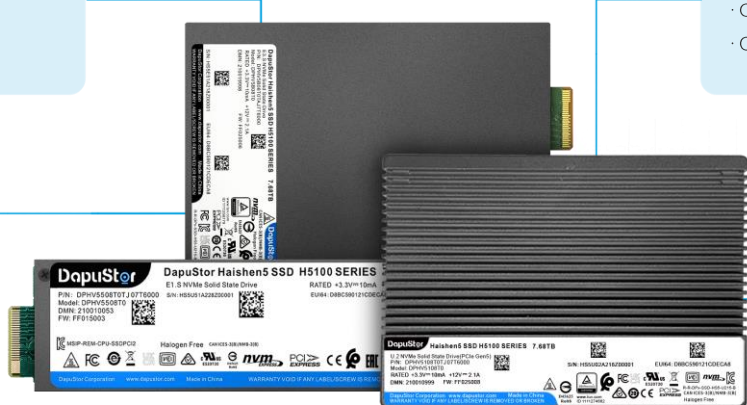

Marvell® Bravera™ SC5 SSD Controllers

PCIe 5.0 SSD Controller supporting up to 16 NAND Channels for enabling next generation cloud storage solutions. Featuring ultra low latency (< 6μs) can enable SSD storage solutions that offer levers to control and meter performance at the drive level being able to offload hypervisors and free up host system resources.

Haishen5 Series

DapuStor Enterprise NVMe SSD



| Product Specifications

PCN (Product Code Name)	H5100				H5300			
Capacity(TB)	3.84	7.68	15.36	30.72	3.2	6.4	12.8	25.6
Form Factor	U.2 15mm							
Interface	PCIe 5.0×4, NVMe 2.0							
Read Bandwidth (128KB) MB/s	14000	14000	14000	14000	14000	14000	14000	14000
Write Bandwidth (128KB) MB/s	6300	8500	9000	8500	6300	8500	9000	8500
Random Read (4KB)K IOPS	2800	2800	2800	2800	2800	2800	2800	2800
Random Write (4KB) K IOPS	300	380	400	400	650	750	750	750
4K Random Latency (Typ.) R/W μs	57/8	54/8			57/8	54/8		
4K Sequential Latency (Typ.) R/W μs	7/8							
Typical Power(W)	17	17	19	19	17	17	19	19
Idle Power(W)	5.5	5.5	5.5	6	5.5	5.5	5.5	6
Flash Type	3D eTLC NAND Flash							
Endurance	1 DWPD				3 DWPD			
MTBF	2.5 million hours							
UBER	1 sector per 10 ¹⁷ bits read							
Warranty	5 yrs							
Key Features	NVMe 2.0, NVMe MI 1.1, OCP 2.5, TCG OPAL 2.0 security standards, NVMe Sanitize, Secure Boot, hot-swapping, online updates, out-of-band updates, multi-namespace support, end-to-end data protection, power loss protection, full-path data protection, T10 DIF/DIX, WRR, Flash RAID 2.0, IDW, DSM, SMART, telemetry, device power management, atomic write, over-temperature protection, universal clock (RefClk), multiple sector formats (VSS), multi-stream, NAND dynamic offset tuning, FDP, SGL, CMB, MDTS, and more.							


*Differences in hardware, software, or configuration will affect actual test results.

✉ mkt@dapustor.com

☎ +86 400-9938-968

🌐 <http://en.dapustor.com/>

📍 Chuangtou Building, Longgang District, Shenzhen , China



Copyright© DapuStor Corporation All rights reserved.

Any third party can't extract or copy any part or the whole content of the document without the permission of the company. And any third party can't distribute in any way.

All trademarks in this document belong to DapuStor Corporation

DapuStor